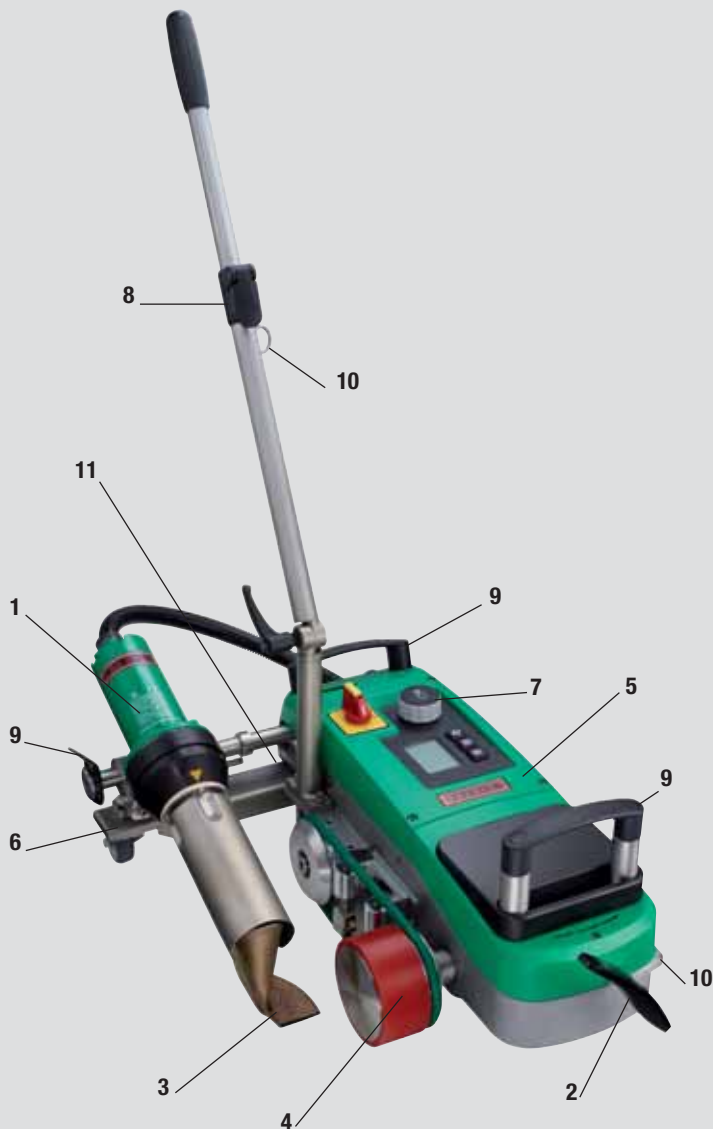


Hot air welder

VARIANT T1

The sturdy VARIANT T1 is distinguished by its outstanding top speed of up to 59 ft/min. Combined with a slim, compact design, it allows a perfect view into the weld seam from all sides. Special attention has been paid to smooth, ergonomic handling in daily use. Numerous new developments in the VARIANT T1 are clear proof of this.



1		Economical: Up to 59 ft/min welding speed and powerful, maintenance-free hot air blower.
2		Easy handling: Smooth lifting device and sturdy transport rollers for precise positioning.
3		Reliable: Constant, wrinkle-free welds thanks to process-optimized nozzle.
4		Compact design: The unmistakable Leister design guarantees a perfect view into the weld seam from all sides.
5		Exceptional: Electronics protected against the effects of unwanted high-frequency signals.
6		Mobile: Extremely mobile joint axis for compensating minor unevenness in the floor.
7		Very easy operation: Simple operation using the proven Leister »e-Drive« operating concept.
8		Ergonomic: Guide bar with length and angle adjustment for working without harming your back.
9		Simple guidance: Sturdy carrying and guide handles for ergonomically guiding and transporting the device.
10		Clever details: Non-torsion cable fastening with spring clips on the guide rod or on the housing.
11		Hem/pipe welding kit: Welding hems, hem pockets and piping in short time with easy-to-use accessories.



Constant, wrinkle-free overlap welds.
















Very easy hem and piping welds with the hem/pipe welding kit.

Hot air welder

VARIANT T1

- Top welding speed up to 59 ft/min
- Perfect view into the weld seam
- Sturdy and durable for professional use
- Smooth lifting device for precise positioning
- Simple operation thanks to Leister »e-Drive« operating concept

Accessories VARIANT T1

	142.650	Hem/pipe welding kit complete, comprising: 142.221 hold-down device 141.326 piping roll 140.530 Hem/piping add-on part
	140.530	Hem/piping add-on part
	142.221	Hold-down device
	141.326	Piping roll
	139.438	Additional weight 6.6 lbs
	137.843	Upper part of T-handle guide bar
	116.798	Brass brush
	140.771	Overlap welding nozzle 0.8 inch
	141.558	Overlap welding nozzle 1.6 inch
	140.429	Overlap pressure roller 1.0 inch complete
	138.938	Overlap pressure roller 1.8 inch complete
	107.612 107.613	Spare part heating element 230 V 400 V
	142.705	Sturdy storage case

Technical data

Voltage	V~	230 / 400 (2LNPE)
Power	W	3680 / 5700
Temperature	°F	212 – 1148
Speed	ft/min	4.9 – 59
Air flow range	%	40 – 100
Weld seam width	inch	0.66 or 1.57
Dimensions (L × B × H)	inch	16.5 × 10.6 × 7.5
Weight	lbs	48.5 (without 4.9 inch cord)
Conformity Marking		2
Protection class I		1

Article No.:

141.891	VARIANT T1, 230 V / 3680 W, 40 mm nozzle, with Euro plug
141.892	VARIANT T1, 230 V / 3680 W, 20 mm nozzle, with Euro plug
141.893	VARIANT T1, 400 V / 5700 W, 40 mm nozzle, with CEE plug (3LNPE)
141.894	VARIANT T1, 400 V / 5700 W, 20 mm nozzle, with CEE plug (3LNPE)

Other versions available upon request.